


R03P-PVC

Super Heavy Duty Battery



Dimensions

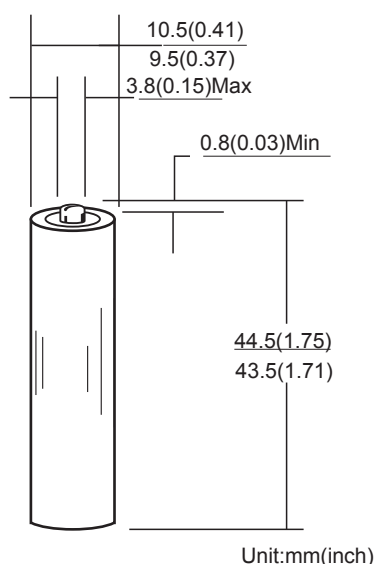

Specifications

Chemical System:	Zinc-Manganese Dioxide (Zinc Chloride Electrolyte)
IEC Name:	R03
ANSI/NEDA:	24D(AAA)
Camelion Model:	R03P
Average Weight:	7.2g
Dimension(ΦxH)	10.0 ^{±0.5} x 44.0 ^{±0.5} mm 0.39 ^{±0.02} x 1.73 ^{±0.02} inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	470mAh (Rated at 25mA to 0.8V)
Operating Temperature:	-18℃-55℃
Storage Temperature:	15℃-25℃
Relative Humidity:	60±15%
Jacket :	PVC

Usage Guide



Flashlight



Clock



Radio

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals.

Keep away from metal or other conductive materials.

2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.

3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.

4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

Notice:

Environmental elements comply with 2006/66/EC requirements.This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty . For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.

R03P-PVC

Super Heavy Duty Battery

ANSI/IEC Standard Testing

Typical characteristics 21 °C

